



**TAMKO**<sup>®</sup>  
BUILDING PRODUCTS



## **MOISTURE GUARD PLUS<sup>®</sup>**

### **SELF-ADHERING UNDERLAYMENT**

TAMKO<sup>®</sup> Moisture Guard Plus<sup>®</sup> underlayment provides an extra layer of roofing protection to help prevent water penetration caused by windblown rain or ice damming. This self-adhering SBS-modified bitumen sheet creates a moisture barrier by sealing to the deck and around nails to provide years of continuous protection.

# MOISTURE GUARD PLUS<sup>®</sup>

## SELF-ADHERING UNDERLAYMENT

### IMPORTANT


This product features a skid resistant and tear resistant surface. This feature does not serve as a substitute for following all proper fall protection procedures in accordance with OSHA regulatory requirements—including the use of personal fall protection devices when working on a roof. Applicator safety is of utmost importance.

### FEATURES AND BENEFITS

- Mineral surfacing—provides enhanced skid resistance.
- Strong fiberglass reinforcement—adds stability during installation.
- Flexible SBS-modified asphalt—seals tightly around nails to prevent water penetration.
- Split plastic release film—eases installation and handling.
- Self-adheres directly to plywood decks—for fast and simple installation.
- High temperature resistance up to 250°F.
- Can be left exposed for up to 90 days before application of finished roof.
- Meets ASTM D 1970, ICC-ESR-1252, U.L. Prepared Roofing Accessory.
- Available in full wrapper (nonboxed).

### PRODUCT DATA\*

	1 Square	1.5 Squares	2 Squares
Thickness	55 mil	55 mil	55 mil
Roll size	100 sq. ft.	150 sq. ft.	200 sq. ft.
Roll dimensions	39 $\frac{3}{8}$ " x 30' 5 $\frac{3}{4}$ "	39 $\frac{3}{8}$ " x 45' 8 $\frac{1}{2}$ "	39 $\frac{3}{8}$ " x 60' 11 $\frac{1}{2}$ "
Rolls per pallet	40	30	25
Pallet size	37" x 47"	37" x 47"	37" x 47"
Packaging	Full Wrapper (nonboxed)	Full Wrapper (nonboxed)	Full Wrapper (nonboxed)

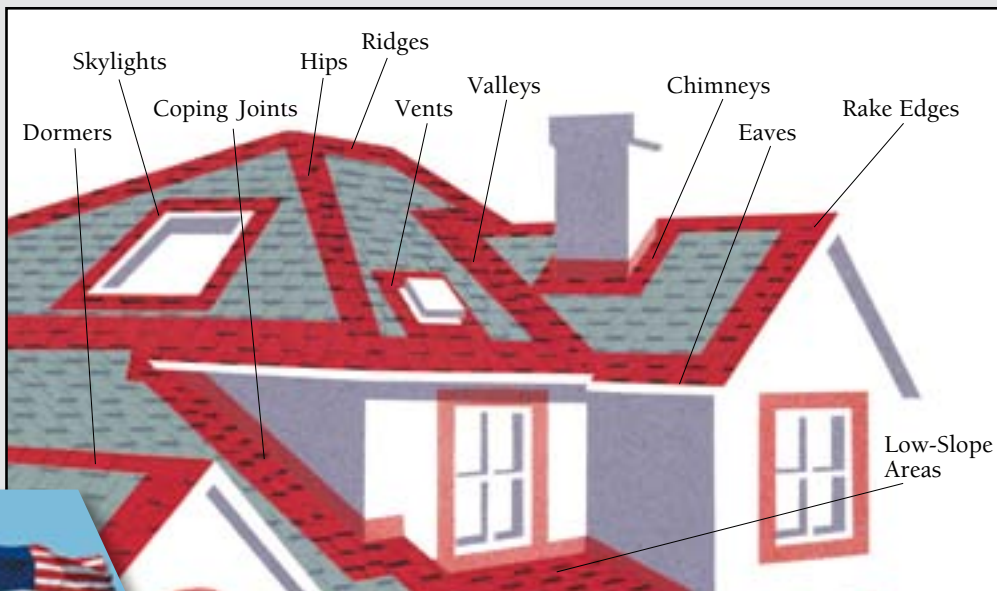

Nail holes and joints in your roof deck provide the channels for water to seep through.



Wind-blown rain trapped under your roof's top layer seeks out those channels.



Backed up at the eaves by ice dams, melting snow finds access the same way.



Applying a layer of Moisture Guard Plus to the deck at all rake and eave edges a minimum of 24" beyond the interior wall line will provide a last line of defense against leaks, to help prevent backed-up water from getting into the home.

## BUILDING PRODUCTS FOR THE PROFESSIONAL.

Not recommended for use under metal roofing. Use TAMKO<sup>®</sup> TW Metal and Tile Underlayment or TW Underlayment under metal roofing applications.

TAMKO and Moisture Guard Plus are registered trademarks of TAMKO Building Products, Inc. Note: TAMKO products should be applied in accordance with the directions listed above and on the product wrapper. If conditions require special fastening methods, obtain written recommendations from TAMKO. Information included in this brochure was current at the time of printing. To obtain a copy of the most current version of this brochure, visit us online at [tamko.com](http://tamko.com) or call us at 1-800-641-4691.

\*All values stated as nominal.

©2013 TAMKO Building Products, Inc.



P.O. Box 1404  
Joplin, MO 64802-1404  
1-800-641-4691  
[tamko.com](http://tamko.com)

